




Power Grip

High Speed Clutch

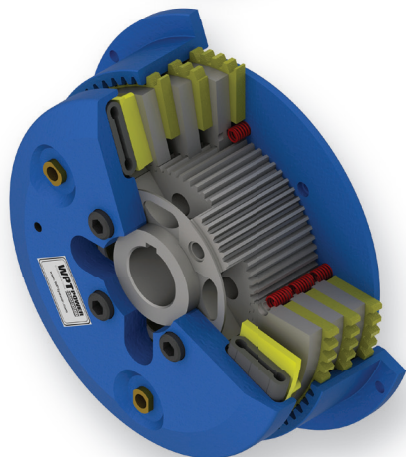

The Power Grip high speed clutch is designed to withstand the most severe applications imaginable. The heavy-duty, laminated gear tooth friction discs withstand heavy shock loads and the torsional vibrations of internal combustion engines. Drive rings are designed to fit standard SAE industrial flywheels for easy installation.

Model	A	B	C	Max. Bore ¹	Weight lb (kg)
214H	3/4 (19.1)	6 1/2 (165.1)	16 5/16 (414.3)	3.25 (82.6)	212 (96)
314H	3/4 (19.1)	8 (203.2)	16 5/16 (414.3)	3.25 (82.6)	290 (132)
218	3/8 (9.53)	7 1/8 (181.0)	20 (508.0)	3.88 (98.4)	397 (180)
318	3/8 (9.53)	8 7/8 (225.4)	20 (508.0)	3.88 (98.4)	501 (227)
321	3/4 (19.1)	10 1/8 (257.2)	21 5/16 (541.3)	4.75 (120.7)	738 (335)

¹ Larger bore sizes available upon request.

